

Handy Blacklist S60

Copyright © Epocware, Paragon Software Group

<http://www.epocware.com>


Handy Blacklist

Handy Blacklist application filters incoming calls according to your needs. It has 2 modes: a **black list** mode and an **allow list** mode.

In the **black list** mode all callers listed in a black list are automatically blocked. This will help you blocking unwanted persons, private or even all unknown callers.

In the **allow list** mode all callers listed in an allow list are allowed to call you. All others are automatically rejected. This will help you filtering incoming calls depending on your current situation, e.g. when you are in a meeting, or on your holiday.

- To edit numbers in a list, select it and go to **Options > Edit**.
- To create an allow list, go to **Options > New allow list**.
- To activate a list, select it and go to **Options > Activate**.
- To activate a list for some time interval, select it and go to **Options > Timed activation**, then set the desired duration.
- To deactivate the currently active list, select it and go to **Options > Deactivate**.
- To view the **log** of blocked calls, press the joystick right.
- To set a reject action for an allow list, go to **Options > Set reject action**.

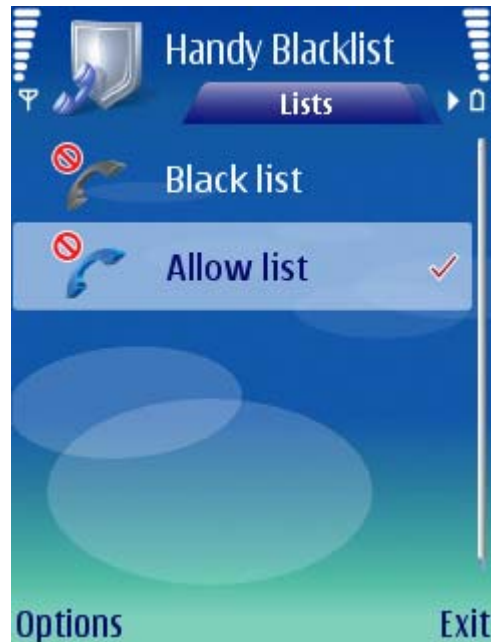

Black list

The black list contains phone numbers and contacts that should be automatically blocked.

- To add a phone number, go to **Options > Add number > Manually**.
- To add a phone number from the recent call list, go to **Options > Add number > From recent calls**.
- To add a contact from **Contacts** application, go to **Options > Add number > Contact**.
- To block all private callers, go to **Options > Add number > Private numbers**.
- To block all unknown callers (not listed in Contacts), go to **Options > Add number > Unknown numbers**.



Allow list

An allow list contains phone numbers, contacts and contact groups that should be allowed to call you. All other callers will be automatically rejected.

- To add a phone number from the recent call list, go to **Options > Add number > From recent calls**.
- To add a contact from **Contacts** application, go to **Options > Add number > Contact**.
- To add a contact group from **Contacts** application, go to **Options > Add number > Contact group**.

You can also set a reject action for blocked calls. For instance, an SMS message can be sent back to a blocked caller with some predefined text, e.g. "I am on meeting, call me later".

- To set a reject action for the allow list, go to **Options > Set reject action**.



Reject action

To set a reject action for an allow list, go to **Options > Set reject action**.

- **Reject action** – set a reject action (Reject calls, Reject and send SMS back).
- **SMS text** – a predefined text of SMS message that to be sent to rejected caller.
- **Send SMS to** – whom to send SMS messages: to all callers, or to those listed in Contacts only.
- **Send SMS at** – how to send SMS messages for repeating calls from the same party: at first rejected call, or at every rejected call.

Log

The **Log** view of **Handy Blacklist** shows the history of blocked calls.

Calls blocked by the black list are shown as blocked.

Calls blocked by allow lists are shown as missed.

- To remove a phone number from the black list (if it was added there by mistake), select it in the list and go to **Options > Remove from black list**.
- To add a phone number or contact to some allow list, select it in the list and go to **Options > Add to allow list**.
- To clear the log, go to **Options > Clear log**.



Settings

To access **Handy Blacklist** settings, go to **Options > Settings**.

- **Active Standby indicator** – if to show a small indicator with the active list name and icon in phone's Active Standby screen.
- **Notify missed calls** – if to notify about calls missed (rejected) during allow list active period.
- **Add rejected numbers** – if to offer adding unknown rejected callers to the black list.
- **Log duration** – the time for keeping information about blocked calls.

Registering

You can use this application during 14 days demo period. Then you will need to register. You can register on-line at our web site (go to **Options > About**).

After a purchase you will get your serial number by e-mail and a link for downloading the full version of the application. Serial number consists of 2 groups of 8 digits, e.g. 12345678-12345678.

Install the full version over the trial one to keep all your data and settings. Enter the serial number at the first application start.